




RL Series (18 years life)

Model No.	Voltage	Capacity (10 hrs/25C)	Weight	Terminal	Dimension (mm)
	(V)	(AH)	(Kg)		(LxWxH)
RL2200	2	200	14.0	F10	171 * 111 * 366
RL2200S	2	200	13.6	F10	207.5*110*239
RL2250	2	250	17.5	F10	171*150*365
RL2275S	2	200	17.8	F10	207.5*142*239
RL2300	2	300	19.0	F10	171 * 150 * 365
RL2350	2	350	24.5	F10	211*176*329
RL2400	2	400	26.0	F10	211 * 176 * 329
RL2450	2	450	29.0	F10	242 * 172 * 329
RL2500	2	500	30.5	F10	242 * 172 * 329
RL2500S	2	500	31.0	F10	207.5*240*239
RL2600	2	600	37.0	F10	302 * 175 * 328
RL2650	2	650	40.0	F10	302 * 175 * 328
RL2750	2	750	46.0	F10	411 * 175 * 327
RL2800	2	800	50.0	F10	411 * 175 * 327
RL21000	2	1000	62.0	F10	475 * 175 * 327
RL21200	2	1200	76.0	F10	475 * 175 * 327
RL21500	2	1500	96.0	F10	401 * 352 * 338
RL22000	2	2000	126.5	F10	490 * 349 * 338
RL22500	2	2500	171.0	F10	712 * 351 * 338
RL23000	2	3000	193.0	F10	712 * 351 * 338

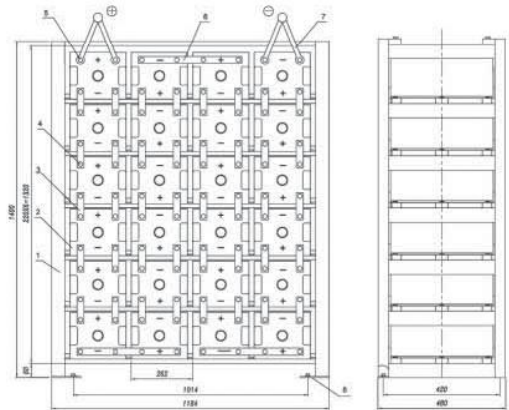

Technology Requirement:

Pay attention to the positive and the negative of battery when assembled. Please place batteries in terms of our drawings instruction strictly. The gap between two batteries will be 20mm. Please screw the bolts tightly.